

Meet Fluffo and discover the potential of your walls! Choose your wall panels from our extensive offer full of fantastic shapes and colours. Create your own wall arrangement and give your interior a warmer, more intimate character.

Fluffo layer (1mm)

The colourful Fluffo finish. Millions of tiny polyamide fibres (1mm in length) glued vertically to the surface. Remember! Fluffo finish is antistatic and light-fast.

Foam layer (2 to 5 cm)

Flexible, high density polyurethane foam exceptionally resistant to ageing.

Go ahead, play with the shapes!



Fluffo wall panels - shapes that are soft and sensuous to the touch.

Our carefully designed 3D panels come in many complex shapes and are covered with the Fluffo finish resembling velvet. They are soft and flexible, you can sink your hand into them. When assembled together they create fancy wall patterns, where the crevices between the panels are an integral part of the design. **Welcome to the Fluffo world. Come in and transform your walls!**






Fluffo panels soundproofing properties

The soundproofing properties of our panels were tested in 2014 in the Acoustic Laboratory of the Construction Technology Institute in Warsaw. The test results showed that **Fluffo panels are excellent at absorbing sounds.**

The secret of the perfect soundproofing properties of Fluffo products lies in the open cell structure of the high density polyurethane foam they are made of. Its properties are additionally enhanced by the exterior layer of the thick microfibers covering all Fluffo products.

In the study conducted in accordance with the PN-EN ISO 11654:1999 standard, Fluffo panels reached the average noise suppression coefficient of 0,85 over the entire frequency band. The soundproofing curve, in relation to the sound frequency of 300 to 3000 Hz ratio (level of human speech), does not drop below 0,8.

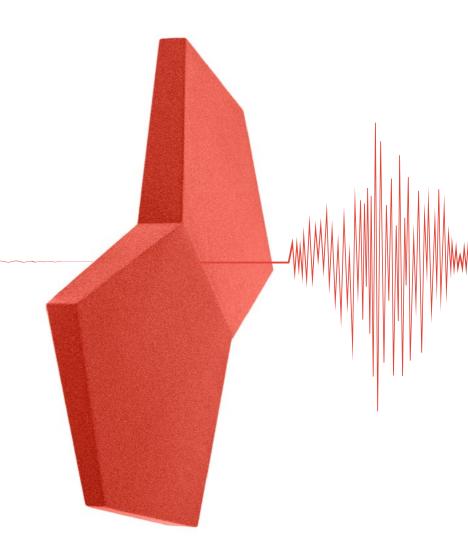




rich colour palette! Play with shape and colour.

Until now similar solutions were most often available in grey or dark grey. Now you don't have to limit yourself. Take advantage of our




Simple shape, but extremely glamorous design. The convex middle part of the panel adds some body and density. It works great in an arrangement which does not require side trimming. We recommend it in a bicolour set with one dominant colour and accents created by the other on a few selected panels.

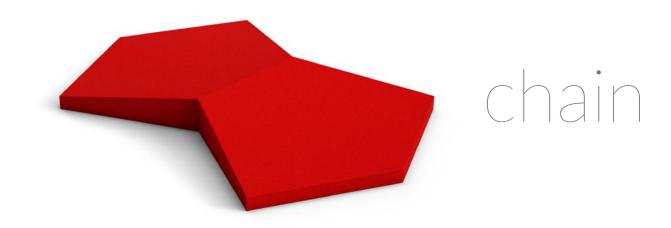








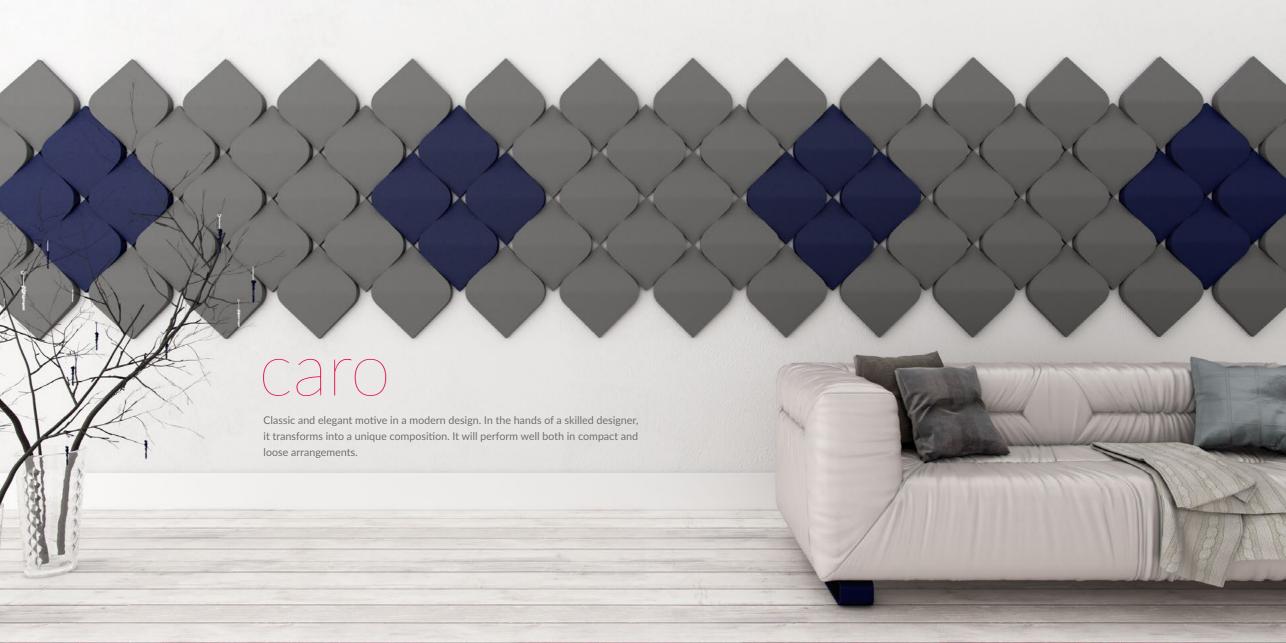



A simple form with great potential for interesting arrangements.

Our Cube is a square cut at an angle. You can play with the 3D effect thanks to the difference in thickness of its opposite edges. It works well on wide wall surfaces where the spatial dimension effect of the panels is most impressive.

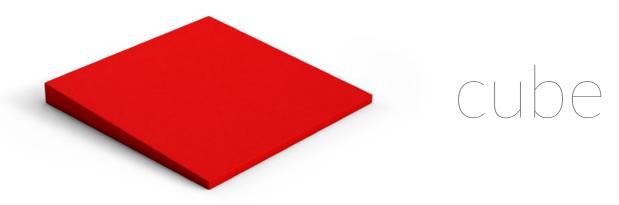












The power of simplicity. Dots is a collection of circles available in 4 thicknesses. Unlimited arrangement possibilities and the wide selection of Fluffo colours constitute a wonderful inspiration to a daring investor and designer. Even a small number of scattered Dots will add character to your interior.

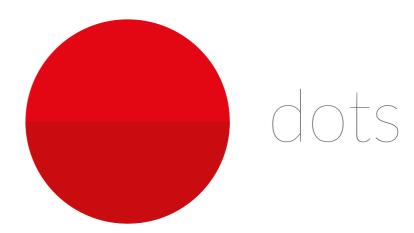





























Mini twin brother of the Cube. Thanks to the significant differences in thickness on a small surface, it creates a staggering 3D effect adding originality and panache to the interior. In combination with Pixel, it unlocks potential for maverick wall arrangement. Perfect for small, compact compositions.







Thickness: 20, 30, 40, 50 mm

CARO




Thickness: 20 - 50 mm

TRIADA




Thickness: 20, 30, 40, 50 mm

NIKE




Thickness: 20, 30, 40, 50 mm

CUBIC



Thickness: 20 - 50 mm

TWIST




BOUNCE




Thickness: 20 - 50 mm

OBLONG



Thickness: 20, 30, 40, 50 mm

HEXA




Thickness: 20, 30, 40, 50 mm

CHAIN



Thickness: 20 - 50 mm

TRINITY



Thickness: 20, 30, 40, 50 mm

DOTS

330 mm

Thickness: 20, 30, 40, 50 mm

LINK 2.0



Thickness: 20 - 50 mm



Thickness: 20, 30, 40, 50 mm


LINE



FLOW 2.0


Thickness: 20 - 50 mm

CHEVRON



Thickness: 20 - 50 mm

CUBE




Thickness: 20 - 50 mm

ISOS



Tkickbeśś: 20 - 50 mm

PIXEL



Thickness: 20, 30, 40, 50 mm



Free your imagination!

Most Fluffo panels were designed with the view of assembling the different stencils together. Thus, the possibilities of creating your own wall are endless. Now, you can be creative not only with colours but also with the shapes. The possibilities are endless.

Fluffo panel match chart

	pixel	four	line	trinity	link 2.0	isos	triada	cube	cubic	hexa	oblong	dots	caro	chain	chevron	bounce	flow 2.0	twist
pixel																		
four																		
line																		
trinity																		
link 2.0																		
isos																		
triada																		
cube																		
cubic																		
nike																		
hexa																		
oblong																		
dots																		
caro																		
chain																		
chevron																		
bounce																		
flow 2.0																		
twist																		

recommended possible



The installation of Fluffo panels is simple, quick and clean.

You can easily do it yourself and enjoy the instant effect of your work.

The panels should be affixed to the wall using a flexible mounting adhesive with high initial bonding. A thin strip of the adhesive (about 5mm wide) should be applied to the outline of the panel, then press the panel into place. After application of the adjacent panels, you can adjust their position. You are done!

Fluffo Fix – is foolproof. Works on all surfaces.



We recommend Fluffo Fix for mounting our Fluffo panels, it is an odourless, high initial bonding adhesive that we have tested ourselves. You can purchase the Fluffo Fix with your panel order. This adhesive has many advantages: it does not dry fast and does not shrink. It will glue the Fluffo panels to any surface, glass, plastic or hardboard included. You do not have to prepare the wall in any special way. Make sure it is smooth and free of dust. Fluffo Fix will hold our panels on the ceiling. We've tested it!



Cleaning of Fluffo panels.

The Fluffo finish covering our panels is antistatic and does not attract dust. However, dust can still settle on them, just like on any furniture. In order to remove it, use a soft brush or a vacuum cleaner with a standard brush for upholstered furniture. To remove stubborn stains from the surface of the panel, use a soft sponge slightly moistened with diluted detergent. Should the stain penetrate the panel, remove the dirty panel and replace it with a new one.

Strong cleaning agents disagree with Fluffo panels



Be sure not to over rub the panel surface with a wet sponge and avoid strong detergents, such as bleach or washing powder, you might cause irremovable stains on the panel surface.



Invented, designed and produced in Poland

